



APR Series

Miniature Air Regulator



SPECIFICATIONS

Body

- Glass filled nylon

Bonnet

- Glass filled nylon

Seals

- Buna N

Supply Pressure

- 250 psig

Operating Pressure Range

- 5 to 125 psig standard
- 3 to 60 psig optional
- 3 to 20 psig optional

Operating Temperature Range

- 40°F to 120°F

Gauge Ports

- 1/8" standard, full flow



Applications

- Non-relieving diaphragm can be used on liquid applications

FEATURES

- Micro seat finish to ensure no reduced pressure creep
- Diaphragm operation
- Relieving style standard
- Three position non-rising adjustment knob; push to lock, pull to adjust, detach to make tamper resistant
- Easily panel mounted
- Tamper-proof cap included
- Lightweight

PERFORMANCE CHARACTERISTICS

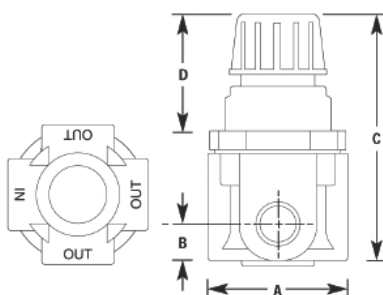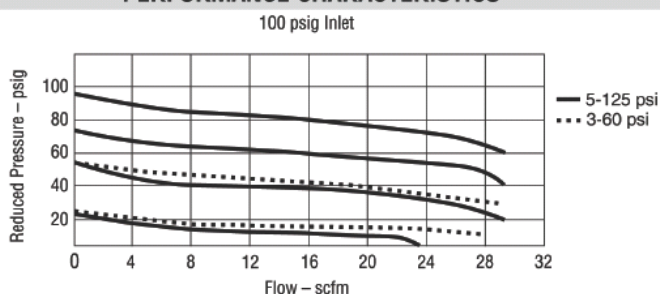

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM	DIMENSIONS (INCHES)				WEIGHT (OZS.)
			A	B	C	D	
1/8"	APR-2F-PM APRN-2F-PM	25	1 1/2	1/2	2 3/4	1 1/4	2
1/4"	APR-4F-PM APRN-4F-PM	25	1 1/2	1/2	2 3/4	1 1/4	2