

PROPRIETARY AND CONFIDENTIAL

Description

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES IS PROHIBITED.

1/16" Shrouded Hose Barb, Valved In-Line Hose Barb Plug Coupling, 1/8" Flow, Natural Acetal Body, Internal Valve and Terminations, Stainless Steel Spring, Buna-N O-ring Seals

NAME DATE  
DRAWN BY: SCW 07-Nov-14

PART# 20ACV-PB2-01 REV 1

SHEET 1 OF 3

SCALE 3:1

DO NOT SCALE DRAWING




**Industrial Specialties Mfg.**  
**IS Med Specialties**


# Specifications

Body and Termination Material	Natural Acetal (POM) - FDA and NSF Compliant for Food Contact
Seal Material Option	Buna-N O-ring - FDA and NSF Compliant for Food Contact O-rings lubricated with Dow Corning 200 food grade silicone oil.
Internal Valve Material	Natural Acetal (POM) - FDA and NSF Compliant for Food Contact
Internal Valve Spring Material	316 Stainless Steel
Operating Pressure Range	Vacuum to 120 psi (8.3 bar)
Operating Temperature Range	-40° F to 180° F (-40° C to 82° C)
Flow Capacity	1/8" Size
Barb Size	1/16" ID Tube Size
Compatibility Statement	<p>It is the sole responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products.</p> <p>Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or product damage.</p>

## 20AC Series Air Flow

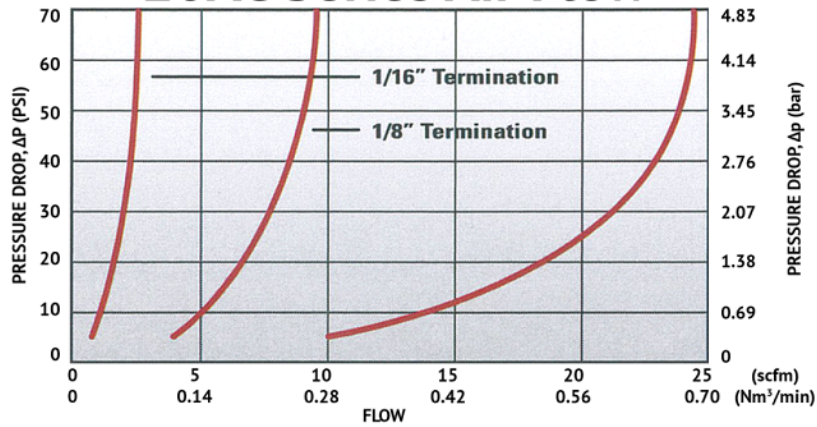

## 20AC Series Water Flow

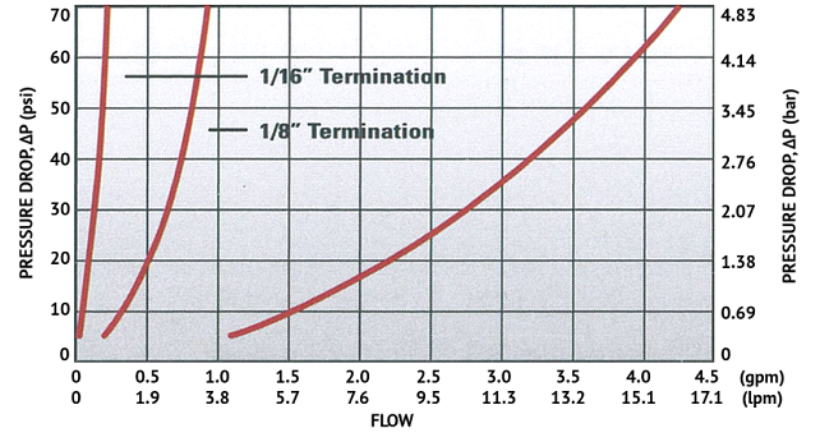

Specific coupling combination flow rates can be determined by using this formula:

$$Q = C_v \times \text{SQRT}(\Delta P / S)$$

SQRT = Square root

Q = Flow rate in gallons per minute

$C_v$  = Average flow rate (see chart)

$\Delta P$  = Pressure drop across coupling (psi)

S = Specific gravity of liquid

### $C_v$ Values for the 20ACV-PB2-01 In-Line Hose Barb Plug Coupling

Sockets:	20ACV-SB2-01	20AC-S2-01	20ACV-SB2-04	20AC-S2-04	20ACV-SB3-02	20AC-S3-02	20ACV-SB3-04
20ACV-PB2-01	0.02	0.02	0.03	0.03	0.03	0.03	0.03

Sockets:	20AC-S3-04	20ACV-SB8-04	20AC-S8-04	20ACV-SB1-02	20AC-S1-02	20ACV-SB1-04	20AC-S1-04
20ACV-PB2-01	0.03	0.03	0.03	0.03	0.03	0.03	0.03

20ACV-PB2-01

SHEET 3 OF 3