

PROPRIETARY AND CONFIDENTIAL

Description

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES IS PROHIBITED.

1/4" OD Tube Size,  
Non-Valved In-Line PTF Plug Coupling,  
1/8" Flow,  
Chrome Plated Brass Body and Terminations,  
Nickel Plated Brass PTF Nut,  
Buna-N O-Ring Seal

NAME DATE  
DRAWN BY: SCW 24-Feb-2015

PART# REV  
20CB-PB9-04 1

SHEET 1 OF 3

SCALE 3:1

DO NOT SCALE DRAWING




**Industrial Specialties Mfg.**  
**IS Med Specialties**


# Specifications

Body and Termination Material	Food Grade Chrome Plated Brass
Seal Material Option	FDA & NSF Compliant Buna-N O-ring Seal
PTF (Ferruleless Polytube Fitting) Nut	Electrodeposited Nickel Plated Brass
Tube Size	1/4" OD, .17" ID
Metric Tube Size	6.4mm OD, 4.3mm ID
Flow Capacity	1/8" Size
Operating Pressure Range	Vacuum to 250 psi ( 17.3 bar)
Operating Temperature Range	-40° F to 180° F (-40° C to 82° C)
Compatibility Statement	<p>It is the sole responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products.</p> <p>Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or product damage.</p>

## 20CB Series Air Flow

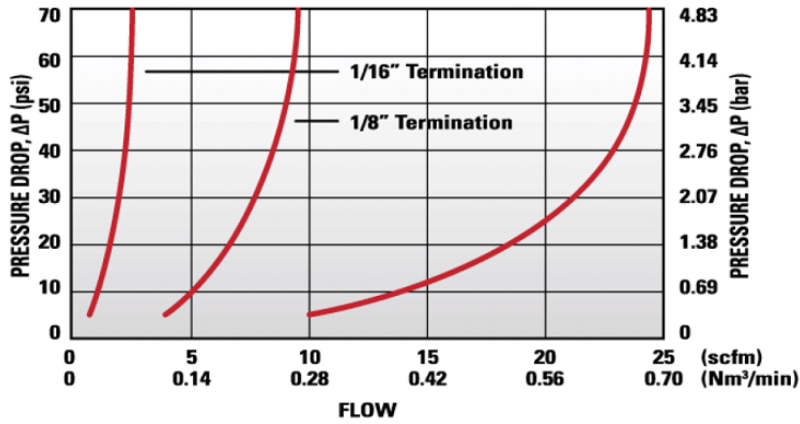

## 20CB Series Water Flow

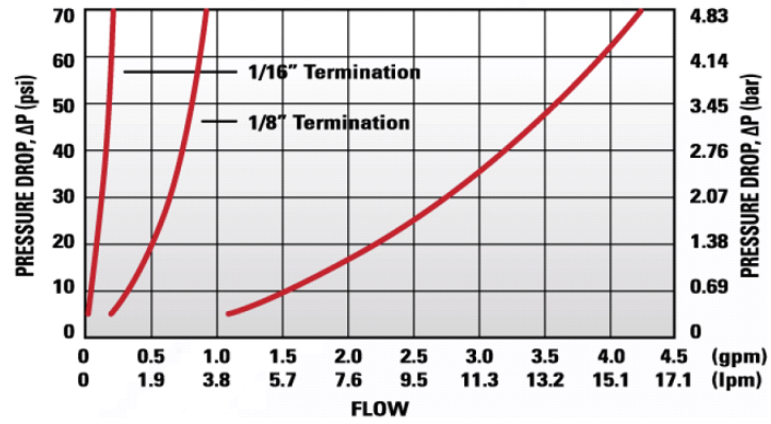

Specific coupling combination flow rates can be determined by using this formula:

$$Q = C_v \times \text{SQRT}(\Delta P / S)$$

SQRT = Square root  
 Q = Flow rate in gallons per minute  
 C<sub>v</sub> = Average flow rate (see chart)  
 ΔP = Pressure drop across coupling (psi)  
 S = Specific gravity of liquid

### C<sub>v</sub> Values for the 20CB-PB9-04 Non-Valved PTF Plug Coupling

Sockets:	20CBV-SB2-04	20CB-S2-04	20CBV-SB3-02	20CB-S3-02	20CBV-SB3-04	20CB-S3-04
20CB-PB9-04	0.23	0.33	0.19	0.24	0.23	0.34

Sockets:	20CBV-SB8-04	20CB-S8-04	20CBV-SB1-02	20CB-S1-02	20CBV-SB1-04	20CB-S1-04
20CB-PB9-04	0.21	0.40	0.27	0.40	0.30	0.40