

PROPRIETARY AND CONFIDENTIAL

Description

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES IS PROHIBITED.

1/8" Hose Barb, Non-Valved Panel Mount Hose Barb Socket Thumb-Latch Type Coupling, 1/8" Flow, Chrome Plated Brass Body and Terminations, Stainless Steel Thumb-Latch, External Springs & Pins, 5/8" 1/2"-24 UNS Nickel Plated Brass Panel Nut

NAME	DATE	PART#	REV
SCW	06-Feb-15	20CB-S3-02	1
DRAWN BY:		SHEET 1 OF 3	
		SCALE 2.5:1	
		DO NOT SCALE DRAWING	
		 Industrial Specialties Mfg. IS Med Specialties	


Specifications

Body and Termination Material	Food Grade Chrome Plated Brass
Thumb-latch Material	301 Stainless Steel
Thumb-latch Spring Material	304 Stainless Steel
Pin Material	316 Stainless Steel
Pin Spring Material	302 Stainless Steel
Panel Mount Nut	5/8" 1/2"-24UNS Electrodeposited Nickel Plated Brass
Operating Pressure Range	Vacuum to 250 psi (17.3 bar)
Operating Temperature Range	-40° F to 180° F (-40° C to 82° C)
Flow Capacity	1/8" Size
Tube Size	1/8" ID, 3.2mm ID
Compatibility Statement	<p>It is the sole responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products.</p> <p>Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or product damage.</p>


Panel Mount Dimensions

	PANEL OPENING	MAX PANEL THICKNESS	MIN PANEL THICKNESS
SOCKETS	Per Drawing	0.5"	0.05"
PLUGS	0.5"	0.3"	0.05"


PANEL NUT HEX SIZE	PANEL NUT THREAD
5/8"	1/2" - 24UNS

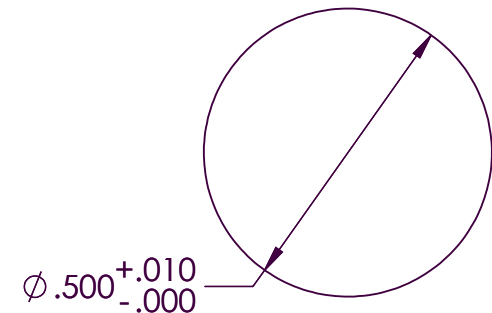

20PP Series Air Flow

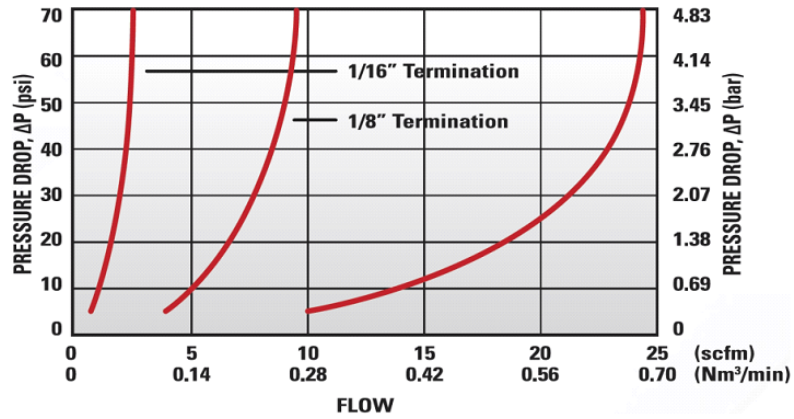

20PP Series Water Flow

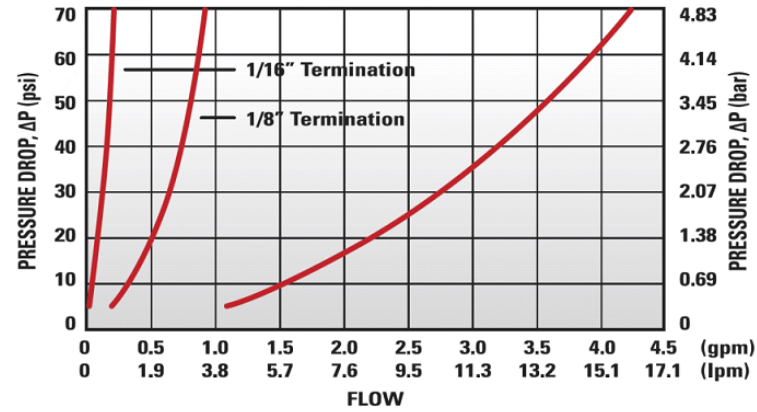

Specific coupling combination flow rates can be determined by using this formula:

$$Q = C_v \times \text{SQRT}(\Delta P / S)$$

SQRT = Square root
 Q = Flow rate in gallons per minute
 C_v = Average flow rate (see chart)
 ΔP = Pressure drop across coupling (psi)
 S = Specific gravity of liquid

C_v Values for the 20CB-S3-02 Non-Valved In-line Hose Barb Socket Coupling

Plugs:	20CBV-PB2-02	20CB-PB2-02	20CBV-PB2-03	20CB-PB2-03	20CBV-PB2-04	20CB-PB2-04	20CBV-PB9-04
20CB-S3-02	0.14	0.19	0.14	0.20	0.15	0.27	0.15

Plugs:	20CB-PB9-04	20CBV-PB1-02	20CB-PB1-02	20CBV-PB1-04	20CB-PB1-04	20CBV-PB4-04	20CB-PB4-04
20CB-S3-02	0.24	0.15	0.27	0.18	0.28	0.16	0.27