

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALITES IS PROHIBITED.

Description

3/8" Hose Barb, Panel Mount Non-Valved Hose Barb Elbow Plug Coupling, 3/8" Flow, Food Grade Udel® Polysulfone Body, Terminations and Panel Mount Nut, Peroxide-Cured EPDM O-Ring and Gasket Seals

DRAWN BY:

NAME

SCW

DATE

16-SEP-2016

PART#

60PS-PE22-06

REV

1

SHEET 1 OF 4

SCALE 3 : 2

DO NOT SCALE DRAWING



Industrial Specialties Mfg.
IS Med Specialties


Specifications

Body and Termination Material	Food Grade Udel® Polysulfone
Seal Material Option	Peroxide-cured EPDM O-ring Seal
Panel Mount Nut	Food Grade Udel® Polysulfone
Operating Pressure Range	Vacuum to 125 psi (8.6 bar)
Operating Temperature Range	-40° F to 280° F (-40° C to 138° C)
Flow Capacity	3/8" Size
Barb Size	3/8" ID, 9.5mm ID
Panel Mount Sealing Gasket	Peroxide-cured EPDM
Compatibility Statement	<p>It is the sole responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products.</p> <p>Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or product damage.</p>

Panel Mount Dimensions


	PANEL OPENING	MAX PANEL THICKNESS	MIN PANEL THICKNESS
SOCKETS	See Drawing	0.3"	0.03"
PLUGS	1.21"	0.3"	0.03"

PANEL NUT HEX SIZE
1.375"

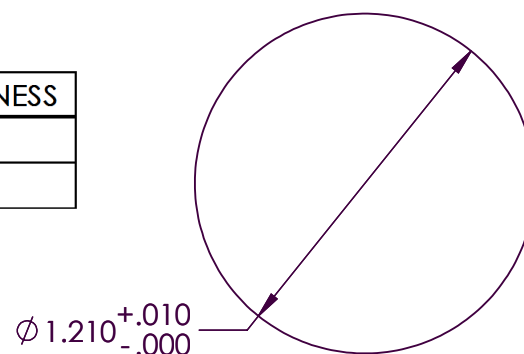


60PS-PE22-06
SHEET 2 OF 4

60PP Series Air Flow

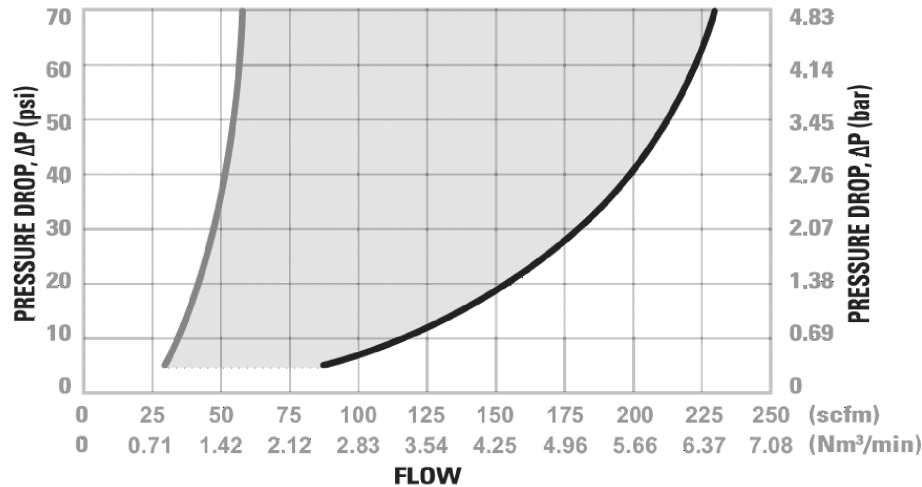

60PP Series Water Flow

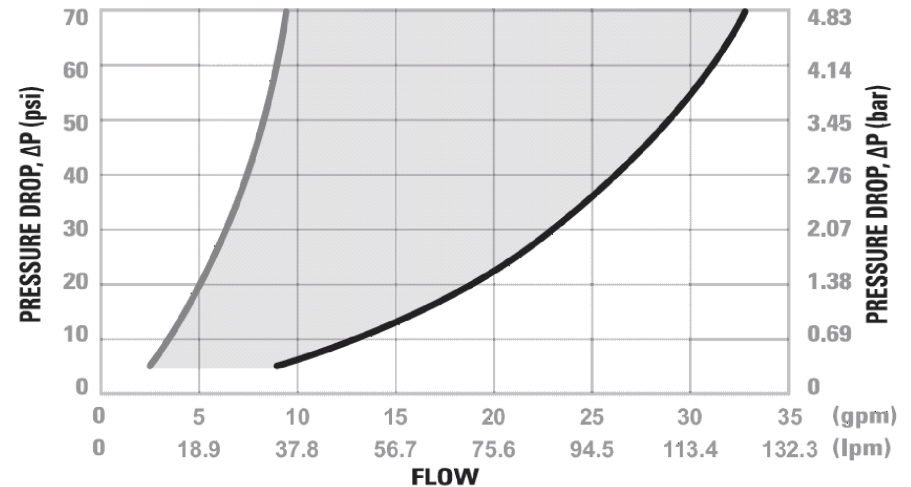

Specific coupling
combination flow rates can
be determined by using this
formula:

$$Q = C_v \times \text{SQRT}(\Delta P/S)$$

SQRT = Square root

Q = Flow rate in gallons per minute

C_v = Average flow rate (see chart)

ΔP = Pressure drop across coupling (psi)

S = Specific gravity of liquid

C_v Values for the 60PS-PE22-06

Non-Valved Panel Mount Elbow Hose Barb Plug Coupling

Sockets:	60PSV- SE1-06	60PSV- SE1-08	60PSV- SE2-06	60PSV- SE2-08	60PSV- SE2-12	60PSV- SE3-06	60PSV- SE3-08	60PS- S2-12
60PS-PE22-06	1.14	1.15	0.96	1.13	-	0.96	1.13	-

60PS-PE22-06

SHEET 3 OF 4

Sterilization and Disinfectant Compatibility

Material	Formalin	Isopropyl Alcohol (IPA)	Ethyl Alcohol	Ethylene Oxide (EtO)	Autoclave	E-Beam (50 kilorays)	GAMMA 5 (50 kilograys)	Dry Heat (250° F)
Polysulfone	Y	Y	Y	Y	Y	Y	Y	Y

Key: Y = Excellent, Recommended, N = Not Recommended

Sterilization Methods:

Disinfectants: Sterilized coupled or uncoupled at 70°F (20°C)

Ethylene Oxide, EtO: Sterilized coupled or uncoupled, up to 5 repetitions, 4 hours maximum, 100% EtO at 110°F (43°C)

Autoclave: Sterilize uncoupled only, 30 minutes Max, 10 repetitions maximum, 250°F (121°C) maximum

Electron Beam (E-Beam): Sterilize coupled or uncoupled, 50 kilograys maximum cumulative exposure

GAMMA: Sterilize coupled or uncoupled, 50 kilograys maximum cumulative exposure

Dry Heat: Sterilize uncoupled only, 250°F (121°C) 12 hours maximum

60PS Series Temperature

