

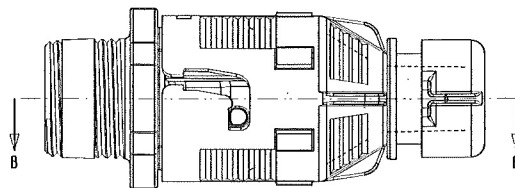
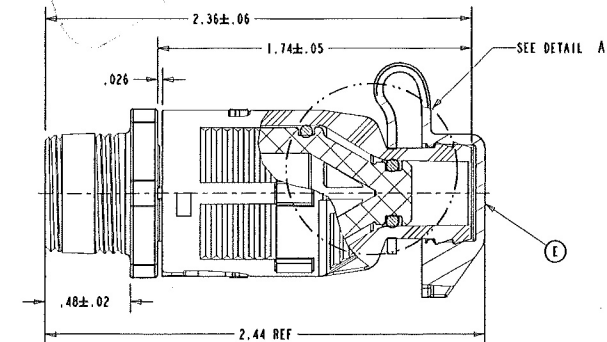


NOTES:


1. O-RING TO BE LUBRICATED WITH A SYNTHETIC OIL SUCH AS "MOBIL 1" PRIOR TO ASSEMBLY.
2. FINAL ASSEMBLY IS TO BE PRESSURE TESTED IN CLOSED POSITION. APPLY 10psi AIR PRESSURE TO THE THREADED END OF ADAPTER. MAXIMUM 0.3 mBAR LEAKAGE IS ALLOWED. TESTING TO BE DONE USING APPROVED LEAK DETECTION EQUIPMENT.
3. VALVE TO BE SHIPPED IN THE CLOSED POSITION WITH THE CAP CLOSED.



CLOSED  
(SHOWN WITH CAP)

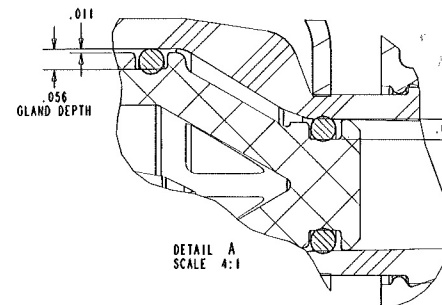


SCALE 1:1

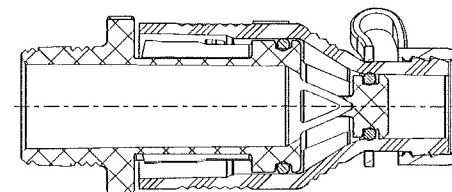

SECTION C-C


BILL OF MATERIALS

| ITEM | QTY | PART NUMBER  | DESCRIPTION                                                                                |
|------|-----|--------------|--------------------------------------------------------------------------------------------|
| A    | 1   | 3862-01-1778 | VALVE SLEEVE - 30% G.F. PBT (YELLOW)                                                       |
| B    | 1   | 7450-00-9909 | 5417-00-2951CT ADAPTER - ZINC DIE CAST/CLEAR CHROMATE WITH LOCTITE VIBRA SEAL #513 (WHITE) |
| C    | 1   | 3805-00-8230 | O-RING - NITRILE                                                                           |
| D    | 1   | 3864-00-8230 | O-RING - NITRILE                                                                           |
| E    | 1   | 3812-01-3872 | CAP - POLYESTER ELASTOMER (BLACK)                                                          |




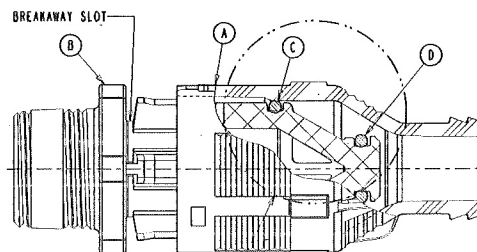


SEE DETAIL B

OPEN  
(SHOWN WITHOUT CAP)

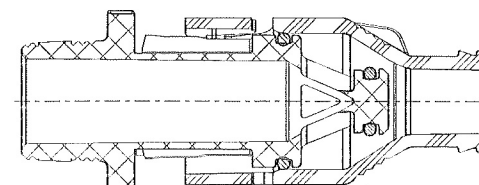

SECTION C-C

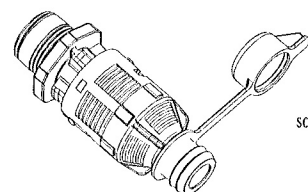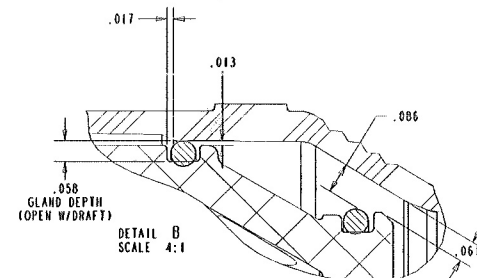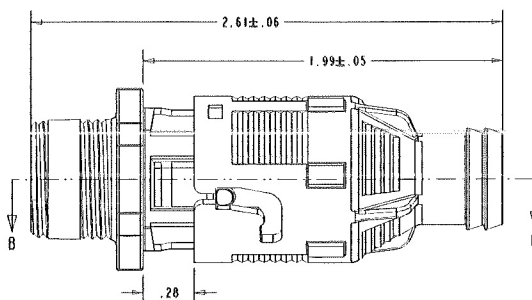

SCALE 1:1

|          |                      |        |          |
|----------|----------------------|--------|----------|
| DRAWN BY | S. CIESIELKA         | DATE   | 05-03-06 |
| CHK BY   | S. CIESIELKA         | DATE   | 05-03-06 |
| APP BY   | S. CIESIELKA         | DATE   | 05-03-06 |
| MATERIAL | SEE BILL OF MATERIAL |        |          |
| HARDNESS | N/A                  | FINISH | N/A      |

TOLERANCE UNLESS OTHERWISE INDICATED  
DECIMAL ± 0.005  
ANGULAR ± 2°  
ENGINEER S. CIESIELKA  
SCALE 2:1  
This print and any design thereon is the property of FASTEX. No part of this print may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without written permission of FASTEX.

|                                                              |                  |
|--------------------------------------------------------------|------------------|
| <b>FASTEX</b><br>195 ALGONQUIN ROAD / DES PLAINES, IL. 60016 |                  |
| NAME LC OIL DRAIN VALVE                                      |                  |
| WITH CAP AND THREAD SEAL                                     |                  |
| FIG#                                                         | PROJ# P04-07-008 |
| PART#                                                        | 7447-01-9909     |
| ISSUE                                                        | 3                |

SALES DRAWING AVAILABLE

|     |      |                                                                |          |          |
|-----|------|----------------------------------------------------------------|----------|----------|
| 3   | 6900 | COMPONENT 3862-01 GEOMETRY CHANGE, P/N CHANGED TO 7447-01-9909 | BSF      | 08-25-09 |
| 2   | 6078 | P/N OF CAP (ITEM E) CORRECTED TO 3812-01-3872                  | BSF      | 01-08-09 |
| 1   | 6409 | RELEASE TO PRODUCTION                                          | SVC      | 06-21-06 |
| NO. | ECN# | REVISION                                                       | APPROVAL | DATE     |

ALL CHANGES TO OCCUR ON CAD SYSTEM

PRINTED COPIES OF THIS DOCUMENT ARE UNCONTROLLED