


NOTE:

- CONTAINS BUNA-N O-RING, ST.STL. 302 SPRINGS AND BALLS. ASSEMBLY IS SECURED WITH AN ADHESIVE/SEALANT THREADLOCKER.
- THRU FLOW UPON DISCONNECTION.

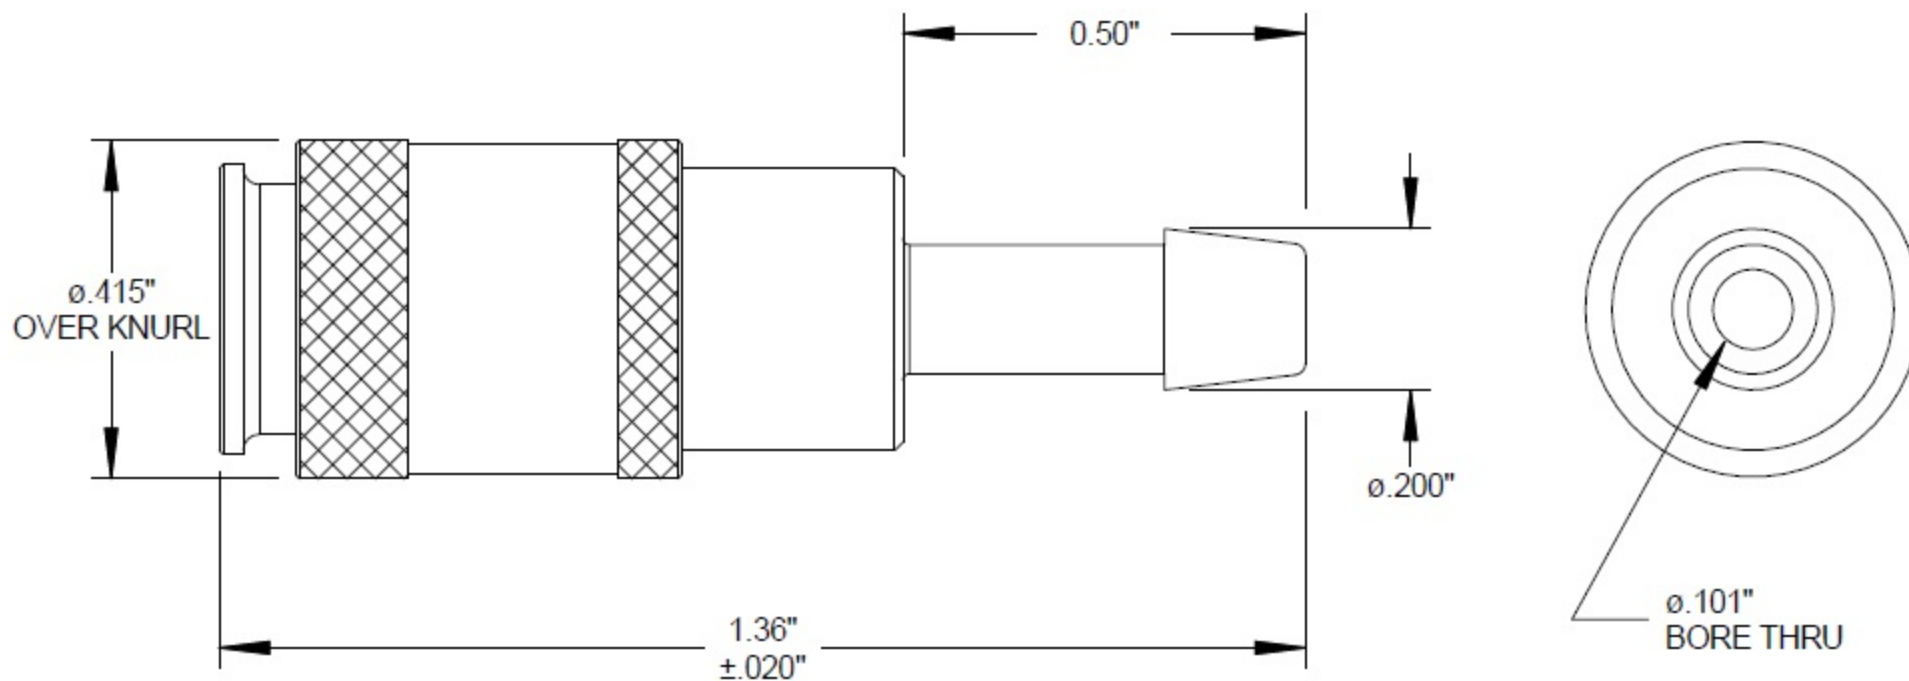

TOLERANCES: unless otherwise noted

.XX ±010  
.XXX ±005  
ANGLES ±3 DEG.

DIMENSIONS ARE IN INCHES

FOR REFERENCE ONLY

<p>PROPRIETARY AND CONFIDENTIAL</p>	<p>Description</p>	<p>NAME</p>	<p>DATE</p>	<p>PART#</p>	<p>REV</p>
<p>THE INFORMATION CONTAINED IN THIS DRAWING IS FOR REFERENCE ONLY AND REMAINS THE SOLE PROPERTY OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALTIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL SPECIALTIES MFG. AND IS MED SPECIALTIES IS PROHIBITED.</p>	<p><b>0.200" Hose Barb Coupler, Nickel Plated Brass</b></p>	<p>DRAWN BY: M.E.</p>	<p>7.1.2022</p>	<p><b>MQC-C200-NI</b></p>	<p>1</p>
		<p>SHEET 1 OF 1</p>		<p><b>ISM</b> Industrial Specialties Mfg. &amp; IS MED Specialties (ISM) industrialspec.com   800-781-8486</p>	
		<p>SCALE: 2:1</p>			
		<p>DO NOT SCALE DRAWING</p>			