


## CVSF Series – Valved Suction Strainer

The CVSF Series Valved Suction Strainer's design promotes multiple outlet end configurations to fit the exact end use application. The inlet end is a 40 Mesh Stainless Steel Suction screen.

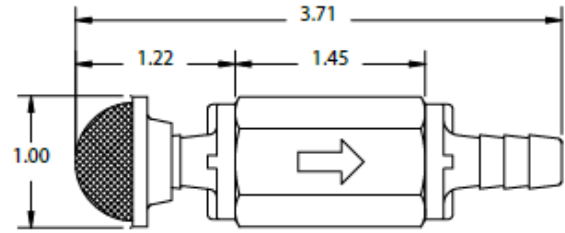

<b>Material Options:</b>	Gray PVC, White PVC, White Polypropylene, Black Polypropylene, Black Nylon, White Nylon, Black Kynar
<b>Seal Options:</b>	Buna-N, EPDM, Viton
<b>End Options:</b>	1/8" Male NPT, 1/4" Male NPT, 1/8" Female NPT, 1/4" Female NPT, 1/8" Hose Barb, 1/4" Hose Barb, 5/16" Hose Barb, 3/8" Hose Barb, 1/2" Hose Barb, 1/4" Push-In, 3/8" Push-In
<b>Cracking Pressure:</b>	1/3, 1, 3, 5, 7, 10, 12 psi
<b>Spring Material:</b>	302 Stainless Steel Spring
<b>Ball Material:</b>	316 Stainless Steel – Standard with Stainless Spring
<b>Max. Operating Pressure:</b>	125 psi
<b>Max. Operating Temp.</b>	140°F
<b>Seat Area Open Diameter:</b>	.250"

*It is the sole responsibility of the system designer and user to select products suitable for their specific application requirements and to ensure proper installation, operation, and maintenance of these products. Material compatibility, product ratings and application details should be considered in the selection. Improper selection or use of products described herein can cause personal injury or product damage.*